

# THOOSA 5000

The Thoosa 5000 is a 48V system. The system uses a permanent magnet motor, set up in a gearing console made in stainless steel and is regulated by a 4-quadrant motor controller.

## Electric Inboard Drive Systems

5kW continuous power  
(Replaces a 10-15HP combustion engine)

### CHARACTERISTICS

#### Increased reliability

Increased reliability  
An electric motor starts every time.

#### Power immediately available

No need for pre-heating – the power is immediately available.

#### Low weight:


The weight of the electric system is very low – and batteries can be distributed for better weight optimization.

#### Low maintenance costs:

The only maintenance parts in the system are the brushes and the gearbelt.

#### Easy installation:

Low weight of the motor and gearing, and a motor controller designed for easy installation.

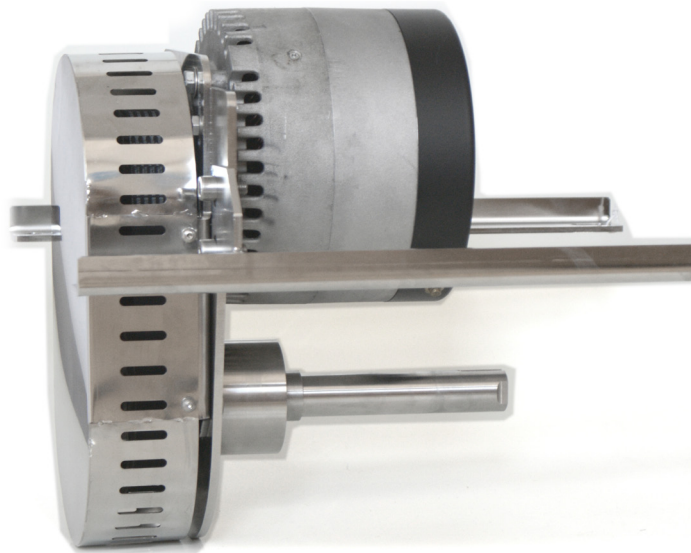

### RECOMMENDED USE

The Thoosa 5000 is made for boats at 15-30 feet

### SECURITY AND COMFORT

An electric motor starts every time - just turn the key, adjust the throttle and GO. With our electric motor, the power kicks in immediately, making harbour manoeuvring easier and more accurate. The system is virtually silent and allows people on deck to speak with each other while manoeuvring in harbours, making the event enjoyable, safer and relaxing. The low weight of the electric motor solution also improves the manoeuvring abilities of the boat since the heaviest part of the system (the batteries) can be moved into e.g. the keel.

### ENVIRONMENT AND COMFORT

Not only does an electric motor solution free the harbour and sea from oil spills, it also frees you from the smell of diesel and exhaust fumes, providing you with a clean engine room, making the onboard environment more pleasant.

### INSTALLATION

Due to the motor and gearing console's low weight, the motor is easy to align without the need for heavy tools. The motor controller is designed for easy installation so throttle, key-lock, charger, battery monitor and DC-DC converter can be connected by "plug and sail".

### MAINTENANCE

The cost of maintenance is very low since it is only needed for two parts. The brushes have a lifetime of 3500 hours. The gear belt has a life time of 3000 hours. Both parts are easy to replace.

### FUNCTIONALITY & EFFICIENCY

The electric motor has a stationary magnetic field (stator) and a rotating magnetic field (rotor) that either attracts or repels each other and thereby creates rotation. Where an "ordinary" DC motor uses standard magnets, the motor in the Thoosa 5000 system uses Neodymium magnets. This makes the motor very powerful and very efficient.

The rpm on the motor are regulated by adjusting the voltage with the motor controller. The motor controller chops the voltage from the batteries into small pulses. The longer the pulses it sends to the motor, the more power and rpm are provided by the motor. This makes the system more efficient.

### POWER CHARACTERISTICS

An internal combustion engine idles at 700-800 rpm – and must rotate at 1500-2000 rpm to make enough torque to drive the boat forward.

Our electric system does not idle and provides full torque at any speed if it runs at full current. This gives you a very high torque available for acceleration. The main power consumption is used to accelerate the boat up to the desired speed. Thereafter, the power consumption drops significantly when using an electric motor.

All in all, this shows that an electric motor solution is a feasible and efficient alternative to a combustion engine.

### CHARGING BATTERIES WHEN GOING FOR SAIL

The Thoosa 5000 has a built in regenerative function (RG).


By RG the motor works as a generator and charges the battery bank, while the boat is driven by wind/sails. When setting the throttle dead slow forward the regenerative charging is activated. The speed due to wind power that exceeds the motor power set by the throttle, is the power that is regenerated.

If the throttle is pushed further forward, then the boat will be driven by the motor unless there is wind enough to drive the boat faster than the throttle setting.

The motor controllers maximum regenerative charging is set to 60Ah. Regeneration is automatically stopped when the battery voltage reaches 60V.

How effective the RG function is, depends among others on the hull structure, size and placement of the propeller and the boat speed for sail in relation to the motoring top speed. ASMO Marine will advice how to get the most out of the RG function.

# THOOSA 5000 | Technical data

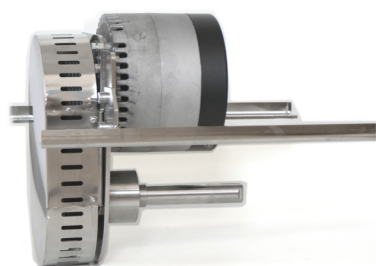


### CUSTOMER SERVICE

Standard design proposal for the specific boat is always included in our offer, free of charge.

If you have special mechanical or electrical requirements to any of our THOOSA systems, please contact us for further information.

Technical data	
Motor type:	AME0709
Voltage	48V DC
Current:	125 Amp (limited by motor controller)
Power output:	5.1 KW
Average efficiency:	86%
Battery regeneration:	Yes
Rated speed engine:	2.160 rpm
Rated torque:	24.8 Nm
Speed constant:	45 rpm/V
Peak current:	300 Amp
Peak Power:	14.3 KW
Peak torque:	59,5 NM
Reduction:	AM D/03
Standard gearing:	24:48 wheel combination
Gear Belt:	624
Standard Rpm propeller shaft:	1080 Rpm
Option Rpm propeller shaft:	925 Rpm
Option Rpm propeller shaft:	810 Rpm
Weight of motor and console:	29 kilo
Weight of Thoosa 6000 system:	47,5 kilo
Recommended boat size:	15-30 feet

### THOOSA 5000 Kit



Motor, included console, with reduction and mounting brackets



Motor Controller



Key Switch System

## ACCESSORIES



### THROTTLE

TO BE ORDERED SEPERATELY!  
There are 2 different types of throttles available.



### BATTERY MONITOR

RECOMMENDED!  
There are 2 different types of Battery Monitors available.



### BATTERY CHARGER

Battery charger 48V / 15Amp  
Battery charger 48V / 30Amp  
Other sizes available